



USB Endoscope OTE120 User Guide

- Handheld Endoscope
- Flexible Cable
- USB 2.0 Connection
- Snapshot Button
- Adjustable Dimmer LED Lighting
- Windows XP/Windows 7/Windows Vista/Mac OSX 10.4/Linux Kernel V2.6

A handy pipeline inspection device helps you search inside hard to reach places.

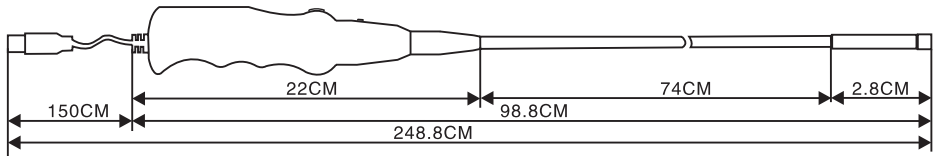

- PC handler
- Flexible cable neck with handle: 96cm long
- Flexible cable neck: 74cm long (2.4ft)
- Flexible cable neck diameter: 6.5mm (0.25in)
- USB cable: 150cm (4.9ft) USB 2.0 interface
- Water resistant camera head with 6 dimmable white LED lighting
- Camera head outer diameter is 7.0mm(0.275in)
- 1/12" VGA CMOS: 640 x 480 pixels
- Lens: F#:2.8 viewable of angle 60 degree
- Focal distance: 3cm ~ infinite
- Frame Rate up to 30fps@ VGA resolution
- Snapshot & LED lighting adjustable

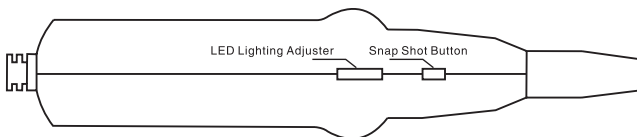

Carry Case Contents

- USB endoscope
- Application CD
- 90 degree mirror accessory(selectable)
- 2M USB cable(selectable)

WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

